


AUTOMATED ROTARY WELD SYSTEM

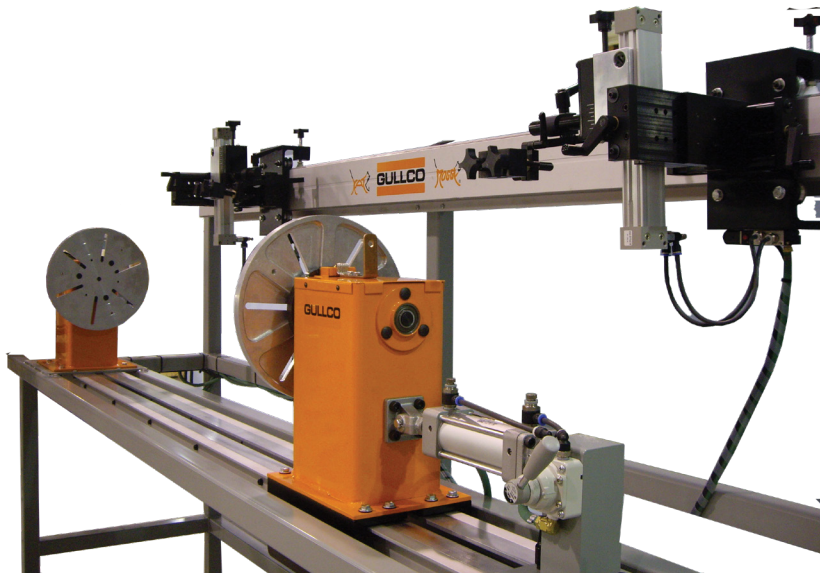

Automate your circumferential welding operations, add efficiency and increased precision with the highly versatile Automatic Rotary Weld System


The rotary weld table with tack feedback interfaced with a PLC to provide precision stop/start, weld stop/start, adjustable rotation speed, weld overlap, multi-pass welding and tack welding

Accurately adjustable tailstock with 6" (152 mm) pneumatic clamping slide.

Motorized torch positioning slide to enable quick and easy loading/unloading of the work piece.

Maximum weight capacity 300 lbs (136 kg)

Table lengths up to 20 ft (6096 mm)




Increase Weld Quality and Improve Production with Automation

IDEAL FOR AUTOMATING PRODUCTION OF CYLINDRICAL PARTS INCLUDING: FLANGES AND END CAPS

GULLCO

GULLCO.COM

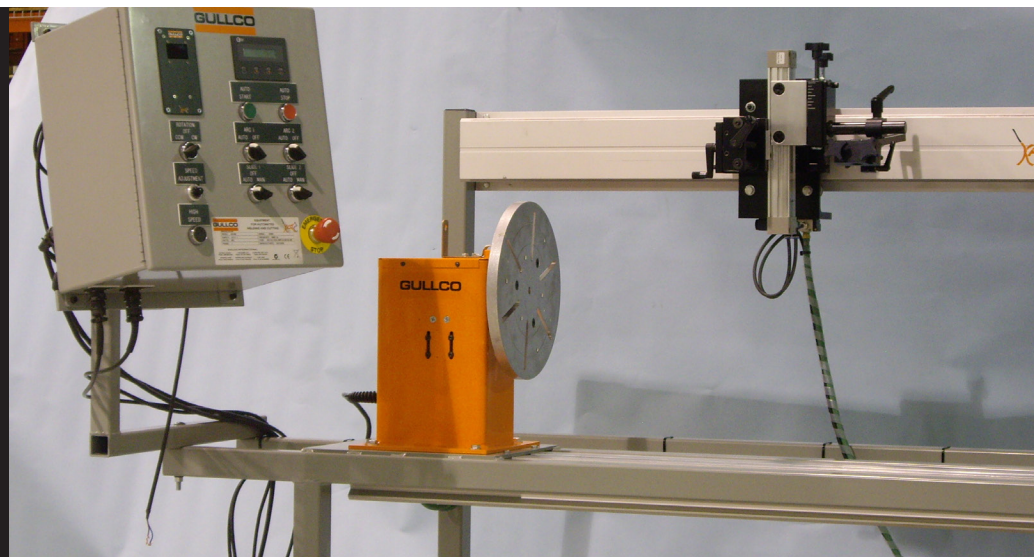


SPECIFICATIONS

The Gullco Automatic Rotary Weld System is a low cost automated welding machine that produces consistent, precision welds on cylindrical work pieces. It is designed to provide repeatable quality welds, either in high or low production. It is easy to operate while providing sophisticated operational flexibility.

The Gullco Automatic Rotary Weld System comes complete with...

- Gullco programmable Motor Control interfaced with a PLC providing adjustable rotation speed, rotation stop/start, weld stop/start, wire feed stop/start and emergency stop controls, LED display for all functions
- Headstock...full 360° rotation with adjustable overlap, weld parameters controlled electronically
- Multi-pass Welding...available with automatic torch height adjustment
- Torch Support with rack arm and micro-slide rack box providing vertical torch adjustment, 4 axis torch holder assembly
- Tailstock...accurately adjustable with 6" (152 mm) pneumatic clamping slide
- The bed is heavy duty steel construction available in lengths up to 20 ft (6096 mm)

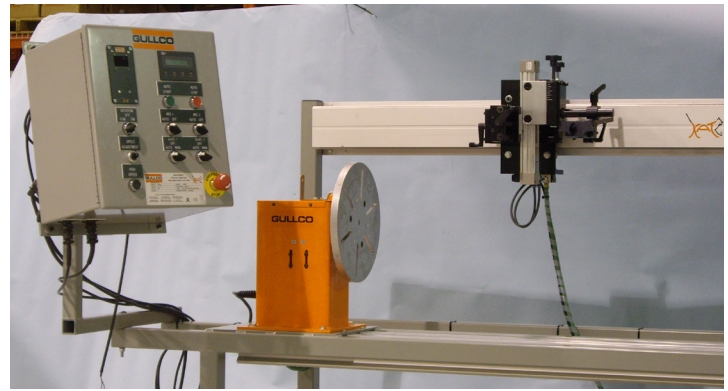

| | |
|----------------------------|---|
| Load Capacity | 300 lbs (136 kg) |
| Pneumatic Tailstock stroke | 6" (152 mm) |
| Max. Part Length | to 20 ft (6096 mm) |
| Weld Diameters | to 18" (475 mm) |
| Adjustable Rotation Speed | 0.25 - 15 rpm |
| Drive Motor | 24 volt DC |
| Voltage | - for operation on either 115/230 volt, single phase, 50/60 Hz Ac power supply. |

SPECIFY VOLTAGE WHEN PLACING ORDER

The Gullco Automatic Rotary Weld System is also available as a multi-torch system

KAT, KBM, MOGGY, KATBAK & SAM are registered trademarks of Gullco Enterprises Limited

Distributed by:

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL DIMENSIONS ARE NOMINAL

GULLCO.COM

RS2204

GULLCO

CANADA - GULLCO INTERNATIONAL LIMITED

Phone: 1-905-953-4140 Fax: 1-905-953-4138 e-mail: sales@gullco.com

U.S.A - GULLCO INTERNATIONAL INC.

Phone: 1-440-439-8333 Fax: 1-234 808-4146 e-mail: ussales@gullco.com

EUROPE - GULLCO INTERNATIONAL (U.K.) LIMITED

Phone: +44 1257-253579 Fax: +44 1257-254629 e-mail: uksales@gullco.com

AUSTRALIA - GULLCO INTERNATIONAL PTY LIMITED

Phone: 61 (0)7 3348 5515 Fax: 61 (0)7 3348 5510 e-mail: ausales@gullco.com

INDIA - GULLCO INTERNATIONAL INDIA PVT LIMITED

Phone: +91-20-2551-1433 Fax: +91-20-2551-1433 e-mail: indsales@gullco.com

CHINA - GULLCO INTERNATIONAL SHANGHAI LIMITED

Phone: +8621-50460341 Fax: +8621-50463554 e-mail: c.zhang@gullco.com

SINGAPORE - GULLCO INTERNATIONAL LIMITED

Phone: +65-9385-4468 e-mail: benny.lim@gullco.com

LATIN AMERICA - GULLCO INTERNATIONAL LIMITED

Phone: 55-11-99485-1336 e-mail: rogerio.macedo@gullco.com

GERMANY - ms gmbh Melchior Schweißtechnik

Phone: +49(0)173 5437722 Fax: +49(0)208 999 38-38 e-mail: christian.mertens@ms-gmbh.com